


**Product Image**



**Product Dimensions**

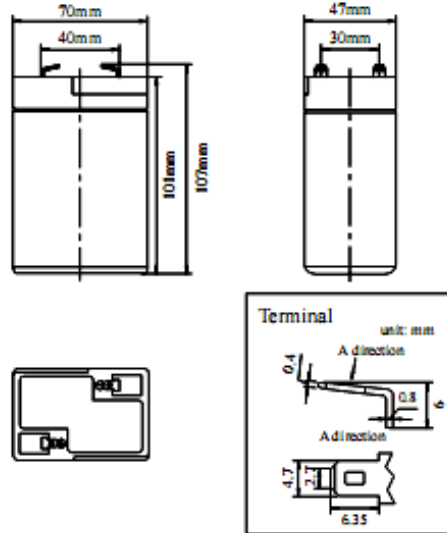

**Characteristics**

Nominal Voltage		6V
Nominal Capacity (20 hour rate)		4.5Ah
Capacity 25°C (77 °F)	10 hour rate (0.43A)	4.3Ah
	5 hour rate (0.8A)	4.0Ah
	1 hour rate (2.97A)	2.97Ah
Internal Resistance	Full Charged Battery 25°C	≤18mΩ
Capacity affected by Temperature (10 hour )	40°C (104 °F)	102%
	25°C (77 °F)	100%
	0°C (32 °F)	85%
	-15°C (5 °F)	65%
Self-Discharge 25°C (77 °F) Capacity	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge (Constant Voltage) 25°C (77 °F)	Float	Initial Charging Current Less than 1.5A Voltage 6.8-6.9V
	Cycle	Initial Charging Current Less than 1.5A Voltage 7.2-7.5V

**Packaging**

Battery Dimensions	Length	70mm
	Width	47mm
	Height	101mm
	Total Height	107mm
Box Dimensions	Length	274mm
	Width	160mm
	Height	147mm
Quantity Per Box		10 pcs per box
Net weight Per Cell		0.8 kg±50g
Net weight Per Box		8.0kg
Gross Weight		8.4kg

**Discharge Constant Current per Cell (Amperes at 77°F 25°C)**







F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	16.50	11.00	8.28	5.50	3.85	3.30	2.06	1.41	0.94	0.63	0.52	0.28
1.65V	16.20	10.80	8.13	5.40	3.78	3.24	2.03	1.39	0.93	0.62	0.51	0.27
1.70V	15.90	10.60	7.98	5.30	3.71	3.18	1.99	1.36	0.91	0.61	0.50	0.27
1.75V	15.60	10.40	7.83	5.20	3.64	3.12	1.95	1.34	0.89	0.60	0.49	0.26
1.80V	15.00	10.00	7.52	5.00	3.50	3.00	1.88	1.28	0.86	0.58	0.48	0.25

**Discharge Constant Power per Cell (Watts at 77°F 25°C)**

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	31.76	21.18	15.93	10.59	7.41	6.35	3.97	2.72	1.81	1.22	1.01	0.53
1.65V	31.19	20.79	15.64	10.40	7.28	6.24	3.90	2.67	1.78	1.20	0.99	0.52
1.70V	30.61	20.41	15.35	10.20	7.14	6.12	3.83	2.62	1.75	1.18	0.97	0.51
1.75V	30.03	20.02	15.06	10.01	7.01	6.01	3.75	2.57	1.72	1.15	0.95	0.50
1.80V	28.88	19.25	14.48	9.63	6.74	5.78	3.61	2.47	1.65	1.11	0.92	0.48

**Note** The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **US** for the latest information.

**Performance Characteristics**

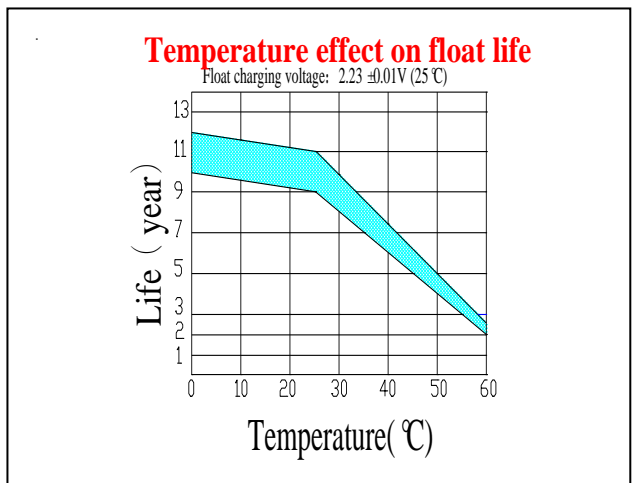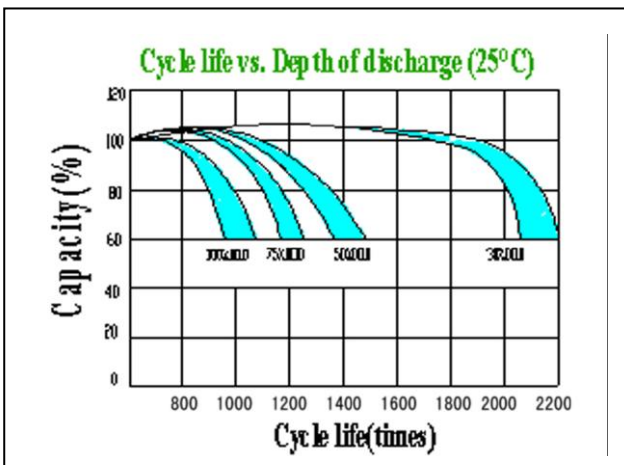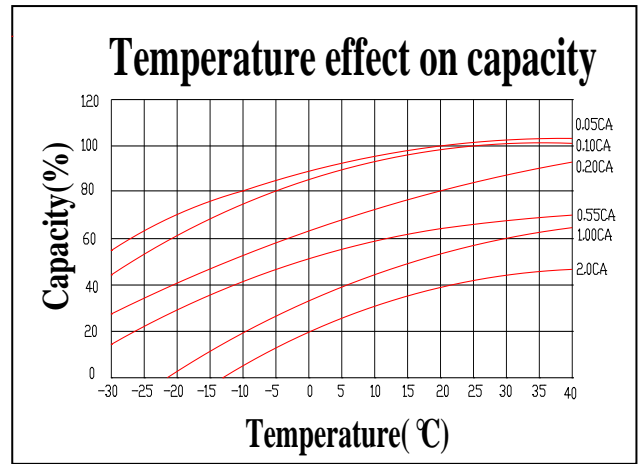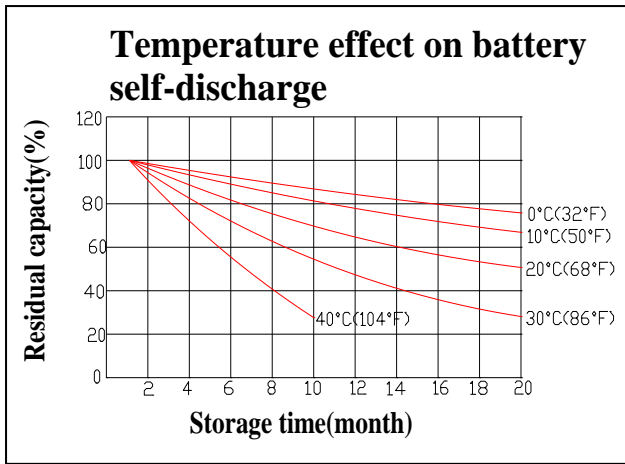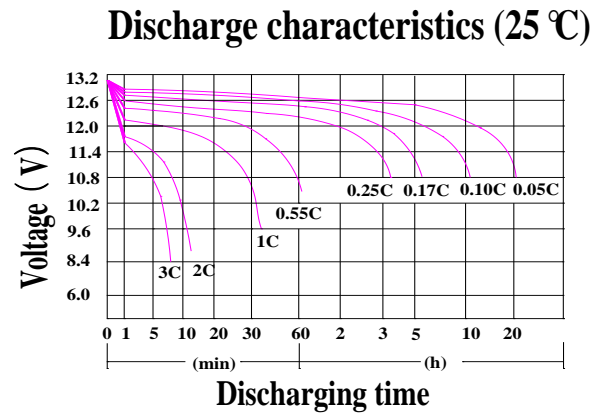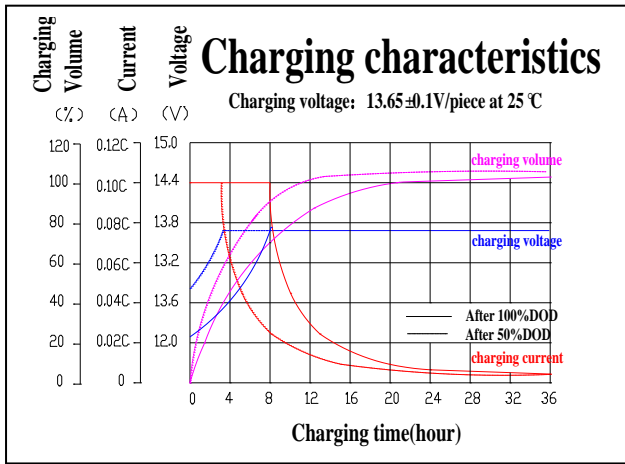

**Battery Construction**

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Si-Rubber	Lead	Fiberglass	Colloid(GEL)

**Guangzhou Hengda Battery Co.,Ltd**

Tel: 020-84866132 02084866098 Fax: 020-84869892  
021-52811136; 021-52826931; 021-52826931-19

**JAPATOYO®**  
<http://www.japatoyo.com>